

GENERON® Nitrogen Generators Industrial Cabinet

Series: CP-4102



Typical Applications

- Gas Assisted Injection Molding (GAIM)
- Heat Treatment of Ferrous & Non-Ferrous Metals
- Inerting of Flammable Liquids & Gases
- Food Packaging
- Laser / Plasma Cutting
- Re-flow and Wave Soldering of PCBs
- Brazing
- Blanketing of Chemical & Pharmaceuticals
- Auto Clave


Advantages of Membrane Cabinets

- Low Operating Pressures
- No Hazardous Storage or Connections
- Low Gas Generating costs
- Low Operating Cost
- Easy to Install
- Near Maintain Free
- Extremely Low dBA levels
- Easily Boosted to High pressure

For over 30 years GENERON has been the world leader in the design and fabrication of Nitrogen Generators. In this time period, GENERON has supplied over 9,000 Nitrogen Generators from the cabinet to large containerized systems. These systems require low maintenance and less power to run.

The GENERON NOW Series is designed and fabricated using the patented GENERON® Hollow Fiber Membranes. This highly engineered systems enables high flow rates in a small modular design.

The membrane module contains thousands of fibers. Compressed feed air is passed down the bores of the fibers at one end of the module with enriched nitrogen product gas exiting from the opposing end. Oxygen and water vapor are selectively removed and vented from the feed air as it flows to the other end of the module.

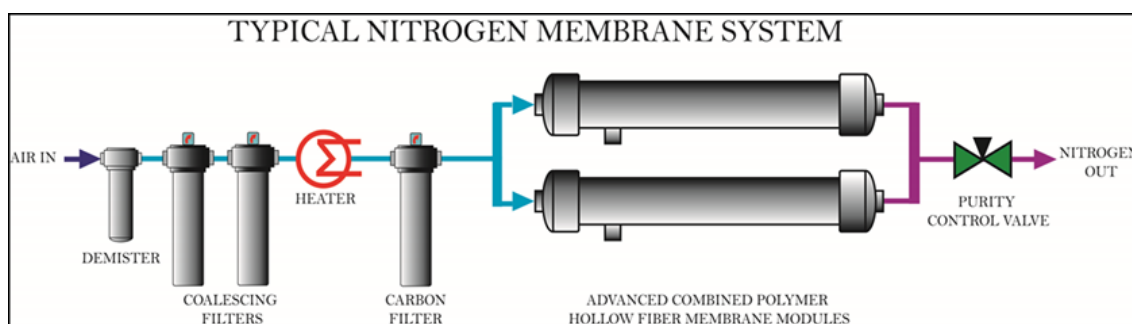

Standard Components

- Combine Polymer Hollow Fiber Membranes (Increased module output performance)
- Oxygen Analyzer (With two (2) dry contact output alarms, 4-20mA output signal)
- Activated Carbon Filter (With an integrated .01 Particulate filter wrap)
- Powder Coated Steel Back Panel
- Purity Control Valve
- Stainless Steel piping, Gauges, and instrumentation

Options

- Performance Heater
- Product Flow Meter
- Inlet Filtration Package
- Auto Shut Down/Startup mode (with manual bypass valve capacity)
- Auto Standby mode
- Off Specification Circuit
- Expandable (in some series sizes)

Special Options

- NEMA 4X (316 Stainless Steel)
- HMI Display Screen: Displays Inlet pressure, outlet pressure, system run status, O2 concentration
- Demister
- Dew Point Analyzer
- Enhanced PLC for Telemetry
- Hazardous Area Classifications

Nitrogen Generators Industrial Cabinet

Series: CP-4102

Nitrogen Membrane NOW CP-4102 Series Specifications & Performance						
100 PSIG Feed Pressure				125 PSIG Feed Pressure		
Nitrogen %	N2 Flow	N2 Pressure	Feed Air Flow	N2 Flow	N2 Pressure	Feed Air Flow
	SCFH	PSIG	SCFM	SCFH	PSIG	SCFM
	NM³H	Barg	NM³H	NM³H	Barg	NM³H
95	1176	95	39.6	1576	120	51.6
	31.03	6.6	62.57	41.58	8.3	81.53
96	990.0	96	36.0	1,326.0	120	46.8
	26.12	6.6	56.88	34.99	8.3	73.94
97	816.0	96	32.6	1,092.0	121	42.4
	21.53	6.6	51.51	28.81	8.3	66.99
98	652.0	97	29.4	872.0	121	38.0
	17.20	6.7	46.45	23.01	8.3	60.04
99	484.0	97	26.4	646.0	122	33.8
	12.77	6.7	41.71	17.04	8.4	53.40
99.5	378.0	97	24.8	504.0	122	31.4
	9.97	6.7	39.18	13.30	8.4	49.61

Nitrogen Membrane NOW CP-4102 Series Specifications & Performance						
150 PSIG Feed Pressure				175 PSIG Feed Pressure		
Nitrogen %	N2 Flow	N2 Pressure	Feed Air Flow	N2 Flow	N2 Pressure	Feed Air Flow
	SCFH	PSIG	SCFM	SCFH	PSIG	SCFM
	NM³H	Barg	NM³H	NM³H	Barg	NM³H
95	1,984.0	145	64.0	2,400.0	170	76.6
	52.35	10.0	101.12	63.32	11.7	121.03
96	1,670.0	145	58.0	2,018.0	170	68.6
	44.06	10.0	91.64	53.25	11.7	108.39
97	1,376.0	146	52.2	1,662.0	171	62.2
	36.31	10.1	82.48	43.85	11.8	98.28
98	1,096.0	146	46.6	1,324.0	171	55.4
	28.92	10.1	73.63	34.93	11.8	87.53
99	92.0	147	41.4	978.0	172	48.8
	2.43	10.1	65.41	25.80	11.9	77.10
99.5	632.0	147	38.0	762.0	172	44.8
	16.68	10.1	60.04	20.11	11.9	70.78

STD.: 68°F 14.5 PSI Inlet Temperature 75°F Dew Point 38°F or <

Approximate Weight and Dimensions				
Standard	H	W	L	Weight
in / lbs	55.2	31.5	19.7	147
mm / kg	1,402	800	500	67

GENERON

16250 Tomball Parkway
Houston, Texas 77086
O - +1 .713. 937.5200
F - +1 .713. 937.5250
www.generon.com

GENERON



D-ICAB-4102-0617