

# GENERON®

## Nitrogen Generator NITROGEN ON WALL Series: NOW-CP6800G-3



### Typical Applications:


- Laboratory and Medical Testing
  - Autoclave
  - Heat Treatment
- Food/Coffee Packaging
  - Boiler Shut Downs
- Inerting of Flammable Liquids & Gases
  - Wine Packaging
  - Electronics
  - Brazing/Soldering
- Blanketing of Chemical & Pharmaceuticals
  - Blanketing of Cosmetics
  - Dry Sprinkler

For over 40 years, GENERON® has been a world leader in the design and fabrication of Nitrogen Generators and has supplied over 9,000 low power and low maintenance Nitrogen Generators from cabinets to large containerized systems.

GENERON's Now Panel Series is designed and fabricated using patented GENERON®Hollow Fiber Membranes. This highly engineered system enables high flow rates in a small modular design. The membrane module contains thousands of fibers. Compressed feed air is passed down the bores of the fibers at one end of the module with enriched nitrogen product gas exiting from the opposing end. Oxygen and water vapor are selectively removed and vented from the feed air as it flows to the other end of the module.

### Standard Components:

- Patented Combined Polymer Hollow Fiber Membranes (high performance module delivery)
- Oxygen Analyzer (with two dry contacts, output alarms, 4-20mA output signal) 120 volt
- Activated Carbon Filter (with an integrated .01 particulate filter wrap)
- Powder Coated Steel Back Panel
- Factory Set Purity Control Valve
- Feed and discharge pressure gauges
- Easy piping connects through union fittings

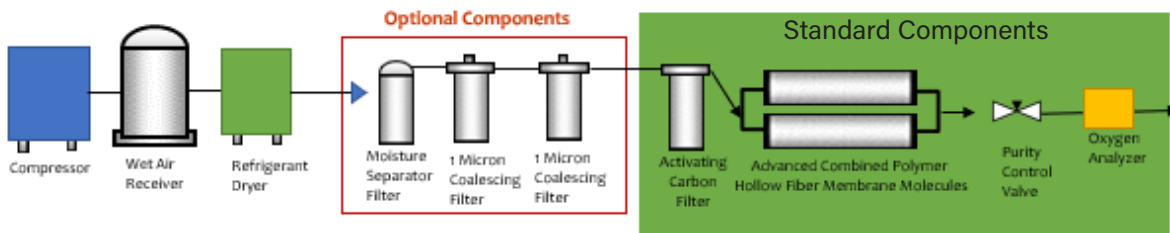

NITROGEN ON THE WALL (NOW) PANELS

# NITROGEN ON WALL: SERIES-NOW-CP6800G-3

Nitrogen Membrane NOW CP6800G-3 Series Specifications & Performance						
Feed Pressure 100PSIG						
Purity %	95%	96%	97%	98%	99%	99.5%
Recovery %	48.9	45.1	41.0	36.1	29.8	25.0
Nitrogen Flow						
SCFH	7,340	6,234	5,183	4,166	3,107	2,430
NM <sup>3</sup> H	192.95	163.88	136.25	109.52	81.68	63.88
Feed Pressure 200PSIG						
Purity %	95%	96%	97%	98%	99%	99.5%
Recovery %	52.5	48.7	44.6	39.8	33.5	28.6
Nitrogen Flow						
SCFH	18,338	15,527	12,857	10,274	7,587	5,879
NM <sup>3</sup> H	482.07	408.18	337.99	270.08	199.45	154.55

STD: 80°F 14.7 PSI Inlet Temperature 80°F Dew Point 40°F or < ISO 8375 Class 1, 4, 1 +/- 3%  
 Contact Factory for purity requirements over 99.5%, purities up to 99.999%, and higher pressure applications

Nominal Weight and Dimensions				
Standard	L	W	H	Weight
in/lbs	50	8	50	82
mm/kg	1,270	203	1,270	37

### Advantages of Membrane Generation:

- GENERON® patented high performance modules are manufactured in our US facility in CA
- No need for hazardous storage or connections
- Easy installation
- No moving parts
- Minimal maintenance required
- Zirconium Oxide sensor (five year durability)
- Low feed air pressure required
- Low feed air flow volumes required
- Low nitrogen generating cost
- No floor space required
- Less < 4 sq. ft of wall space required

### Options:

- Inlet Filtration Package:
  - A. Moisture separator
  - B. 1, and/or .01 Micron Coalescing filters
- Auto Standby
- Product flow meter (thermal dispersion with display)
- Product Compression Booster up to 4,500psig

GENERON USA  
 16250 Tomball Pkwy  
 Houston, Texas 77086  
 Phone: 713.937.5200  
 Fax: 713.937.5250  
 www.generon.com



02/2023

D-NOW-6800-3P